



For more information and product specifications,
please visit nectreusa.com



Specifications, finishes and dimensions are subject to change and should be taken as a guide only. This product may be covered by one or more U.S. patents or pending patent applications. © 2021 Glen Dimplex Americas

nectre.

 A BRAND OF GLEN DIMPLEX AMERICAS

Printed in Canada LI-1035-R00-041421

nectre.

Bring the Heat: High-performance Wood-Fire Products

Established in 1970, the Nectre brand has long been recognized for producing stunning wood-fire designs that pair warmth, comfort and easy to operate features. Nectre takes pride in the quality and integrity of its products, manufacturing units in the company's founding country of Australia.

The Nectre N350 Wood-Fire Oven is beautifully compact, yet powerful enough to heat up to 1,000 sq. ft. The N350 pairs high performance heat, with a cook top and lower oven compartment, making it the practical choice that doesn't compromise in design or quality.

N350 Wood-Fire Oven

Excellent warmth and cooking performance

Features


- Supplied with 2 wire cooking racks
- Cook Top: Direct radiant heat 1/4" (0.6 cm) top plate has 2 removable cook rings
- Cast iron doors and ceramic glass
- Oven temperatures supplied with both a °F and °C thermometer
- "Stay Cool" spring handle
- The adjustable bypass allows for greater fire and oven temperature control by increasing/decreasing the amount of air into the firebox
- With the flue bypass dampener closed, flue gases spill over the internal side plates of the firebox creating a convection cooking effect




10 YEAR WARRANTY

Dimensions (WxHxD)
21-5/8" x 34" x 21"
54.9 cm x 86.3 cm x 54.3 cm

Clearances

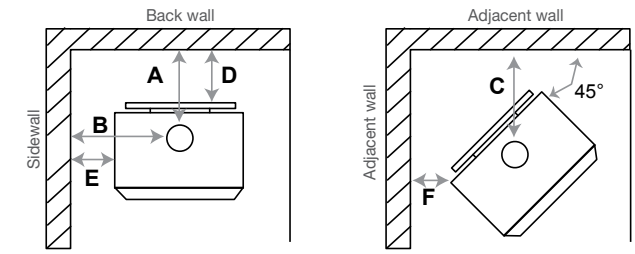

Minimum Clearance	Single Wall Connector	Double Wall Connector
A Back wall to flue pipe	16.5" (41.9 cm)	10.5" (26.7 cm)
B Side wall to flue pipe	22" (55.9 cm)	18" (45.7 cm)
C Wall to flue pipe	20" (50.8 cm)	15" (38.1 cm)
D Back wall to appliance	14" (35.6 cm)	8" (20.3 cm)
E Side wall to appliance	14" (35.6 cm)	10" (25.4 cm)
F Wall to appliance	11.5" (29.2 cm)	6.5" (16.5 cm)

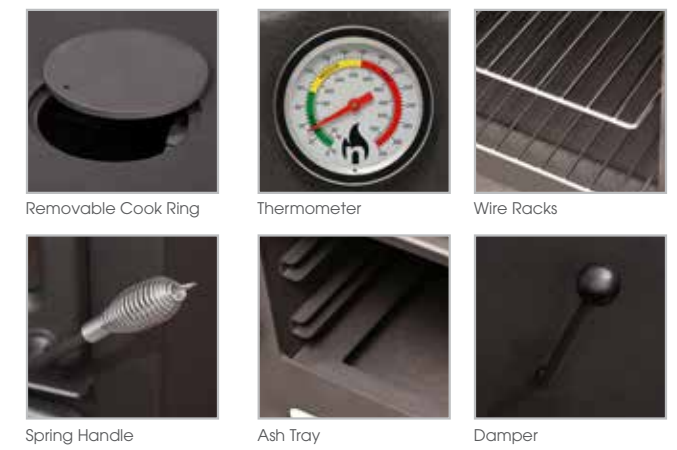

Specifications

- 78% EFFICIENCY**
- 30,000 BTU**
- 1.49 cu. ft. (0.042 m³) FIREBOX VOLUME**
- 13" (33.0 cm) MAX LOG**
- UP-TO 1,000 sq. ft. (up to 92.9 m²) COVERAGE**
- 1/4" (0.6 cm) CONSTRUCTION**

At Nectre, we develop the next generation of efficient, low emission wood heaters. We keep steadily improving our designs as well as production techniques. The result is products that are built to perform at the highest standards, yet ultimately meet the most important criteria: providing people with warmth and home comfort.

The Nectre N550 with its robust oven and stove top cooking features, is the perfect wood-fire oven for remote locations or anywhere wood is the preferred fuel source. Powerful enough to heat up to 2,500 sq. ft. of living area, the N550 can be enjoyed as a primary heating source.

N550 Wood-Fire Oven

Powerful heat output with stylish good looks

Features


- Supplied with 2 wire cooking racks
- Cook Top: Direct radiant heat 1/4" (0.6 cm) top plate has 2 removable cook rings
- Cast iron doors and ceramic glass
- Oven temperatures supplied with both a °F and °C thermometer
- "Stay Cool" spring handle
- The adjustable bypass allows for greater fire and oven temperature control by increasing/decreasing the amount of air into the firebox
- With the flue bypass dampener closed, flue gases spill over the internal side plates of the firebox creating a convection cooking effect



10 YEAR WARRANTY

Dimensions (WxHxD)
26-5/8" x 33" x 19-5/8"
67.5 cm x 83.8 cm x 49.8 cm

Clearances

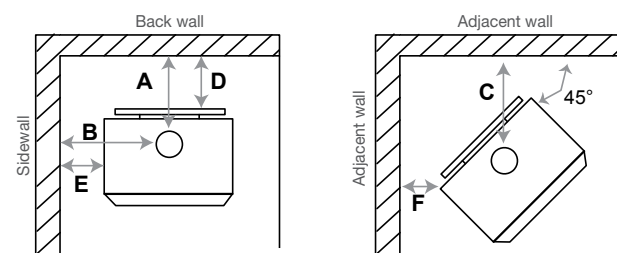

Minimum Clearance	Single Wall Connector	Double Wall Connector
A Back wall to flue pipe	12.5" (31.8 cm)	NA
B Side wall to flue pipe	22-1/2" (57.2 cm)	
C Wall to flue pipe	15" (38.1 cm)	
D Back wall to appliance	10" (25.4 cm)	
E Wall to appliance	12" (30.5 cm)	
F Corner wall to oven corner	5" (12.7 cm)	



Removable Cook Ring



Thermometer



Grill



Spring Handle




Ash Tray



Damper




Specifications


78%
EFFICIENCY


65,000 BTU


1.55 cu. ft.
(0.044 m³)
FIREBOX VOLUME


19"
(48.3 cm)
MAX LOG


UP-TO 2,500 sq. ft.
(up to 232.3 m²)
COVERAGE


1/4"
(0.6 cm)
CONSTRUCTION

Pairing elegant design with powerful heating, the Nectre N65 is leading the way for a new generation of high efficiency, high performance wood stoves in the market. Certified for EPA 2020 New Source Performance Standards, the N65 burns for up to 10 hours and with its low emissions, it can heat up to 2,150 sq. ft. of living area. The Nectre N65 Wood Stove is the perfect addition to any family home, vacation property, or ski chalet.

N65 Wood Stove

Elegant, powerful heating with high efficiency and low emissions

Features

- Certified for EPA 2020 New Source Performance Standards
- Approved hardwood storage box
- Finished in black metallic paint
- Steel door with ceramic glass
- 6" (15.2 cm) stove pipe diameter
- Steel baffle with steel brick retainer and firebrick lining to improve thermal mass
- Rear clearance 10" (25.4 cm)

Clearances



Minimum Clearance	Single Wall Connector	Double Wall Connector
A Back wall to stove rear	13" (33.0 cm)	10" (25.4 cm)
B Back Wall to connector pipe	16.5" (41.9 cm)	13" (33.0 cm)
C Side wall to stove side	12" (30.5 cm)	12" (30.5 cm)
D Side Wall to connector pipe	20.5" (52.1 cm)	20" (50.8 cm)
E Corner wall to stove corner	10.5" (26.7 cm)	6" (15.3 cm)
F Corner wall to connector pipe	18.5" (47.0 cm)	13.5" (34.3 cm)
Minimum ceiling to top of appliance	42" (106.7 cm)	



Dimensions (WxHxD)
22-7/8" x 40-7/8" x 20"
58.1 cm x 103.7 cm x 50.8 cm



Ash Tray



Damper



Damper Handle



Firebrick Lining



Steel Door



Wood Storage



Specifications

67%
EFFICIENCY

1.98g
EMISSIONS

68,500 BTU
(19.8 kW)
PEAK OUTPUT

UP-TO 10hr
BURN TIME

12.6"
(32.0 cm)
MAX LOG

UP-TO 2,150 sq. ft.
(up to 180 m²)
COVERAGE

1/4"
(0.6 cm)
CONSTRUCTION

1.67 cu. ft.
(0.047 m³)
FIREBOX VOLUME