

Direct-wire and Plug-in

ELECTRIC FIREBOXES





The Future of Fireplaces is Clear.™

Revillusion® is a completely new way of looking at fireplaces, and changing the standard for electric. A clear view through the lifelike flames, to the full interior, captures the charm of a woodburning fireplace. Enjoy the look of a fireplace cut straight from the pages of a magazine by choosing Revillusion®; clearly a better fireplace.

Revillusion fireplaces... now with endless possibilities.

Pick a size:











24 inch

30 inch

36 inch

36 inch portrait

42 inch

Pick a backer:





Herringbone Brick

Weathered Concrete


Upgrade the log set:





Add an accessory:





Glass Door

Trim Kit Available for 24" and 30" fireboxes only

Herringbone Backer



25-1/4" x 22-7/8" x 12-1/8" (WxHxD) 61.6 cm x 58.1 cm x 30.8 cm



31-1/4" x 26-5/8" x 12-1/8" (WxHxD) 79.2 cm x 67.6 cm x 30.8 cm



37-1/4" x 26-5/8" x 12-1/8" (WxHxD) 94.4 cm x 67.6 cm x 30.8 cm



37-1/4" x 31" x 12-1/8" (WxHxD) 94.4 cm x 78.8 cm x 30.8 cm



43-1/4" x 31" x 12-1/8" (WxHxD) 109.8 cm x 78.8 cm x 30.8 cm

Direct-wire Electric Fireboxes





Weathered Concrete Backer



25-1/4" x 22-7/8" x 12-1/8" (WxHxD)

61.6 cm x 58.1 cm x 30.8 cm



31-1/4" x 26-5/8" x 12-1/8" (WxHxD) 79.2 cm x 67.6 cm x 30.8 cm



37-1/4" x 26-5/8" x 12-1/8" (WxHxD) 94.4 cm x 67.6 cm x 30.8 cm



37-1/4" x 31" x 12-1/8" (WxHxD) 94.4 cm x 78.8 cm x 30.8 cm



43-1/4" x 31" x 12-1/8" (WxHxD) 109.8 cm x 78.8 cm x 30.8 cm

Direct-wire Electric Fireboxes

Revillusion® Flame Technology

Flames are larger, brighter and more random, appearing from within the logs.

ThruView™ Full-depth Design

See clear through the flames to the back of the firebox for a more authentic experience.

Mirage[™] Flame Panel

Partially frosted acrylic panel is clearly better than a mirror, showing only dazzling flames and no reflections.

Realogs® Plus

A full grate of life-size hardwood-cast logs, tiered for greater depth.

More authentic day or night;

270-degree surround with natural soot markings.

Mood Lighting
Customize the fire

Customize the firebox glow with a choice of warm hues, plus midnight mode.

Color Enhancement

Adjust the flame base color to red or blue.

Brightness and Flicker

Adjust light level to suit the room and choose flicker effect for enhanced firelight.

Ambient Light Sensor

Automatically adjusts firebox light to suit the room day to night.

Quick and Easy Installation

Simply frame, wire and finish – no venting, gas lines or safety screens.

≈ Primary Heat

Option to use 240 volt supply for up to 8,800 BTU - use as part of primary heating plan; heater also operates without flame and can be deactivated.

Direct-wire

Designed to be direct-wired to a 120, 208 or 240 volt circuit for a seamless look (optional plug kit available). *RBF24DLX/RBF24DLXWC - plug attached. Simply plug-in and enjoy or direct-wire to 120V connection only.










Accessories

Glass Pane

Tempered front glass



| Model # | Firebox Size |
|-------------|--------------|
| RBFGLASS30 | 30" |
| RBFGLASS36 | 36" |
| RBFGLASS36P | 36" Portrait |
| RBFGLASS42 | 42" |

* Included with 24" models

Glass Doors

Functional doors with tempered glass



| Model # | Firebox Size |
|------------|--------------|
| RBFDOOR30 | 30" |
| RBFDOOR36 | 36" |
| RBFDOOR36P | 36" Portrait |
| RBFDOOR42 | 42" |

Trim Kits

Available for 24" and 30" fireboxes only



| Model # | Trim Width | Firebox Size |
|-------------|------------|--------------|
| RBF24TRIM36 | 36" | 24" |
| RBF24TRIM40 | 40" | 24" |
| RBF30TRIM38 | 38" | 30" |
| RBF30TRIM44 | 44" | 30" |

-

Model # Firebox Size RBFL24BR 24" RBFL30BR 30" RBFL42BR 36" or 42"



Fresh Cut Log Set

Birch Log Set

| Model # | Firebox Size |
|----------|--------------|
| RBFL24FC | 24" |
| RBFL30FC | 30" |
| RBFL42FC | 36" or 42" |



RBFPLUG

120V power supply cord.

* Included with 24" models

BF Series

A

The Original Dimplex Flame Effect

A blend of technology, artistry and craftsmanship that sets the standard for realism.



Designed to be direct-wired to a 120, 208 or 240 volt circuit for a seamless look (optional plug kit available).

■ Primary Heating

Option to use 208/240 volt supply for up to 9,200 BTU - use as part of primary heating plan.

All-season Flames

Enjoy the unique charm of a fireplace 365 days a year using the flames without the heat.

Cool-touch Glass

Glass remains cool making it safe for children and pets.

Frame, Wire and Finish

Basic installation requires fewer tradespeople, no gas lines, venting or chimney.

Economical

Economical to operate costing only pennies per hour.*

Heater Disable

Easily disable the heater for tamperproof operation in commercial and residential installations.

Options

Door kits, trim kits and control options available.

BFSL33
Includes 3-piece removable trim kit and 3-stage remote control 35-3/4" x 29-7/8" x 9-7/8" (WxHxD) 30.7 cm x 75.8 cm x 25 cm





^{*} Based on national average residential electricity rate. Rates vary.





Accessories

Tamperproof Glass Door



| EK-C | - | | |
|------|---|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Glass Bi-fold Look Door

| Model # | Firebox |
|--------------|------------------|
| BFSL33DOOR | BFSL33 |
| BFGLASS33BLK | BF33DXP |
| BFGLASS39BLK | BF39STP, BF39DXP |
| BFGLASS45BLK | BF45DXP |

| Model # | Firebox |
|---------------|------------------|
| BFDOOR33BLKSM | BF33DXP |
| BFDOOR39BLKSM | BF39STP, BF39DXP |
| BFDOOR45BLKSM | BF45DXP |
| | |

Swing Door



| | | - |
|-----|--|---|
| - | | |
| - | | |
| - | | |
| - | | |
| - | | |
| _ | | |
| | | |
| | | |
| - | | |
| - | | |
| - | | |
| - | | |
| - | | |
| 100 | | |
| | | |

| Model # | Firebox | | |
|--------------|------------------|--|--|
| BFSDOOR39BLK | BF39STP, BF39DXP | | |

Control Options



WRCPF-KITWall switch
remote control kit



TS321WWall-mount thermostat

Model # Firebox BF4TRIM33 BF33DXP BF4TRIM39 BF39STP, BF39DXP BF4TRIM45 BF45DXP



Trim Kit

BFRC-KIT 3-stage remote control kit (included with BFSL33)



BFPLUGEPlug kit, includes
7 ft. cord

MultioFire XHD

Multi-Fire XHD™ Flame Effect High-contrast flames feature improved brightness and character for a dazzling, lifelike effect.

Powerful Heating
Powerful fan-forced heater provides ondemand heat for up to 1,000 square feet.

Molded from meticulously selected and charred hardwood and positioned to maximize the illusion of depth and the appearance of burning firewood (XHD23L, XHD26L, XHD28L).

Acrylic Ice Media Bed
Choose from a variety of brilliant color
themes or cycle through a range of colors
using the custom mode, freezing on the
hue of your choice. (XHD23G, XHD26G,
XHD28G).

Customizable Flame
The Multi-Fire® technology allows you to adjust the speed of the flame to create the perfect atmosphere to suit your mood or room.


Hidden Touch Controls
Settings and temperature display are hidden when not in use.

Built-in Timer
Automatically turns the unit off after up to 8 hours.

Multi-function Remote
Control the fireplace features from the comfort of your chair.



Optional Driftwood &
River Rock Media Kit
available for the
XHD28G & XHD26G fireboxes
XHDDW-KIT

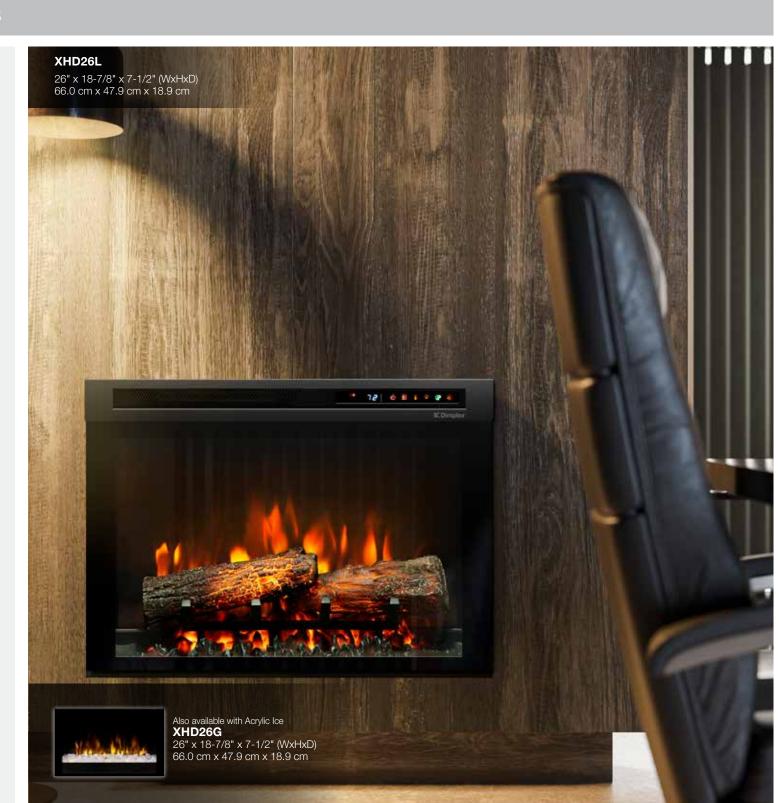






DF Series

- The Original Dimplex Flame Effect™
 A blend of technology, artistry and craftsmanship that sets the standard for realism.
- Supplemental Heating
 Includes a fan-forced heater that provides supplemental warmth for spaces up to 1,000 square feet.
- Thermostat Control
 Provides temperature control to ensure consistent comfort.
- Patented Inner Glow Logs
 Individually molded and hand-finished logs pulse and glow from within for the look of natural burning logs.
 - All-season Flames
 Enjoy the unique charm of a fireplace 365
 days a year using the flames without the heat.
- Cool-touch Glass
 Glass remains cool making it safe for children and pets.
- Multi-function Remote
 Control 100% of the fireplace features from the comfort of your chair.
- Just Plug It In
 Simply plug into any standard household outlet for instant ambiance.
- © Economical
 Economical to operate costing only pennies per hour.*
- Low Carbon Footprint
 The most sustainable fireplace option;
 no emissions and 100% efficient.

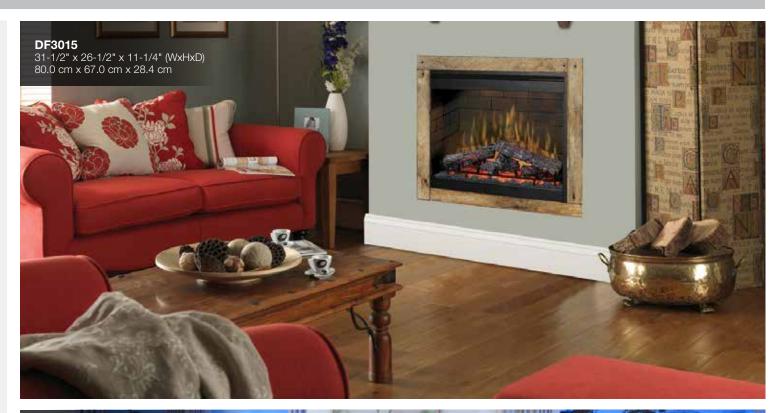



^{*} Based on national average residential electricity rate. Rates vary.

Revillusion Plug-in Electric Log Sets and Dimplex Fireplace Insert









RLG2023-3/4" x 19" x 12-1/2" (WxHxD)
60.3 cm x 48.2 cm x 31.7 cm

Brightness and flicker
Ash mat sold separately (REM-KIT)



RLG20BR

23-3/4" x 19" x 12-1/2" (WxHxD) 60.3 cm x 48.2 cm x 31.7 cm

Brightness and flicker



RLG20FC

23-3/4" x 19" x 12-1/2" (WxHxD) 60.3 cm x 48.2 cm x 31.7 cm

Brightness and flicker



RLG25

25-5/8" x 19" x 13" (WxHxD) 65.0 cm x 48.2 cm x 32.9 cm

♠ Flame base colour
♦ Brightness and flicker



RLG25BR

25-5/8" x 19" x 13" (WxHxD) 65.0 cm x 48.2 cm x 32.9 cm

Brightness and flicker



RLG25FC

25-5/8" x 19" x 13" (WxHxD) 65.0 cm x 48.2 cm x 32.9 cm

Brightness and flicker

















| Firebox Series | Revillusion Deluxe | Revillusion | BFSL Series | BF Series | DF Series | XHD Series | RLG Series | DFI Series |
|----------------------------------|--|------------------------------------|--|---|--|----------------------------------|--|-------------------------------|
| Size | 24" | 30", 36", 36"P, 42" | 33" | 33", 39", 45" | 30", 33" | 23", 26", 28", 33" | 20", 25" | 23" |
| Media | Realog | Realogs® | | Handcrafted logs | Handcrafted logs | Acrylic ice, Realogs® | Realogs®, Fresh cut or Birch logs | Handcrafted logs |
| Inner Glow Logs | • | • | • | BF33, 39,45DXP only | • | • | RLG20/RLG25 only | • |
| Media Color Settings | • | • | | | | • | RLG25 only | |
| Interior Surround | Herringbone or Weathe | ered concrete interior | Black | Black, Authentic brick-look interior | DF3033ST – Black, DF3015 – brick look interior | Black | ThruView [™] full-depth | Black |
| Flame Technology | Revillusion | ® Flame | Original Dimplex® Flame | | Original Dimplex® Flame | Multi-Fire XHD™ | Revillusion® Flame | Original Dimplex® Flame |
| Flame Speed | • | | | | • | • | | |
| Flame Only Mode | • | • | • | • | • | • | • | • |
| Light Settings | Mood lighting, Brigh Ambient ligi | | | | Adjustable brightness | Adjustable brightness | Brightness and flicker | |
| Heat Operation | Comfort\$aver® heating system uses 11% less energy | Option to | Primary heat o use 240V supply for up to 92 | 200 BTU | Supplemental heating | Powerful supplemental heating | Powerful supplemental heating | Powerful supplemental heating |
| Heating Range | Up to 1,00 | 00 sq. ft. | Up to 1,000 sq. ft. | Up to 1,000 sq. ft. | Up to 1,000 sq. ft. | Up to 1,000 sq. ft. | Up to 1,000 sq. ft. | Up to 1,000 sq. ft. |
| Heater Only Mode | • | • | When connected to a | switch or thermostat | | • | | |
| Heater Element | Ceramic | Steel sheathed | Steel st | neathed | Stitched wire | Stitched wire | Ceramic | Stitched wire |
| Heat Disable | Onboard controls or hardware disconnect | | Hardware disconnect only | Hardware disconnect only | Onboard controls | Onboard controls | | |
| Built-in Thermostat | • | • | | | • | • | | |
| Connects to a Wall Thermostat | | | • | • | | | | |
| Wiring Type | Plug-in | Direct-wire (optional plug kit) | Direct-wire (optional plug kit) | Direct-wire (optional plug kit) | Plug-in - DF3015 Plug-in/Direct-wire - DF3033ST | Plug-in | Plug-in | Plug-in |
| Volts | 120 | 120 / 208 / 240 | 120 / 208 / 240 | 120 / 208 / 240 | 120 | 120 | 120 | 120 |
| Watts | 1500 | 1375 / 1975 / 2575 | 1223 / 1823 / 2423 | 1440 / 2100 / 2700 | 1500 / 780 | 1465 | 1500 | 1375 |
| BTU | 5118 | 4400 / 6745 / 8794 | 4173 / 6220 / 8267 | 4913 / 7165 / 9213 | 5120 / 2661 | 5000 | 5118 | 4695 |
| Display | • | • | | | • | • | | |
| Onboard Controls | Hidden touc | h controls | Toggle | Toggle | Toggle | Hidden touch controls | Membrane | Toggle |
| Timer | • | • | | | • | • | | |
| Optional Accessories | • | • | • | • | • | XHD26/28G only | *RLG20 only | • |
| Remote Control | • | • | • | Sold separately | • | • | • | • |
| Warranty | 2-year li | mited | 2-year limited | 2-year limited | 5-year limited parts, 1-year in-home service | 2-year limited parts | 20" series = 1-year limited 25" series = 2 year limited | 1-year limited |

For more information and product specifications, please visit dimplex.com





